


ADHTAPES LTD

Tel: +86-0755-2301-3413 | Web:www.adhtapes.com | Email: info@adhtapes.com

Technical Data Sheet

Thermal spray masking tape is made of the galss fiber cloth as the backing and coated with silicone adhesive.

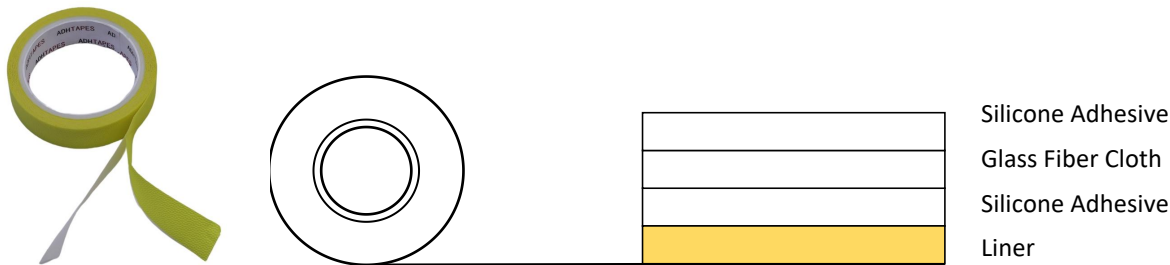

Item	Unit	S19-300
Color	/	White
Liner color	/	Yellow
Adhesive	/	Silicone
Backing	/	Glass cloth
Tape thickness	mm	0.3±0.02
Width	mm	10-500
Length	m	33-300
Adhesive liner side to steel	N /25mm	8-9
Adhesive back side to steel	N/25mm	3-4
Temperature Resistance	°C/30mins	260 800 (short time)

The data in this data table are the measured values of the product under certain conditions and are not guaranteed values.

Application:

- Plasma spraying protection.
- High-temperature spray painting protection.
- Sandblasting protection.