


ADHTAPES LTD

Tel: +86-0755-2301-3413 | Web: www.adhtapes.com | Email: info@adhtapes.com

Technical Data Sheet

Masking tape for paint spraying mainly used for spraying applications on automobiles, plastic parts, hardware components and more. It features outstanding flexibility and excellent paint penetration resistance, suitable for use in both high and low temperatures all year round, and leaves no residue after removal. It meets the stringent masking and color-separation requirements of paint spraying workshops for both water-based and solvent-based paints.

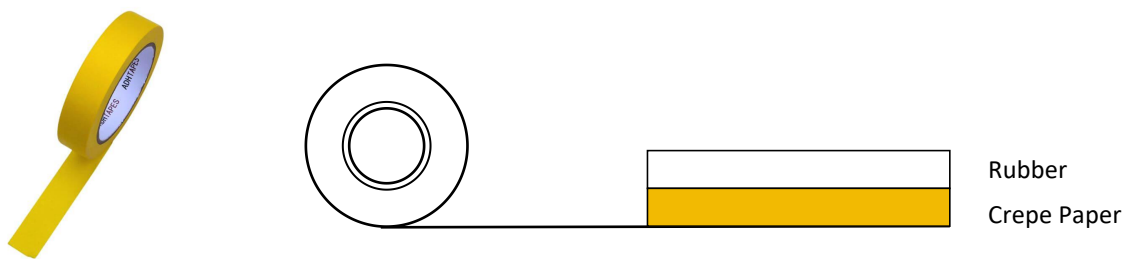

Item	Specification
Total Thickness	140 μm± 10μm
Tensile Strength	≥75 N/25mm
Elongation	≥8%
Peel Strength (to Steel Plate)	≥7 N/25mm
Initial Tack	≥16
Temperature Resistance (45min)	100℃
Backing Material	Crepe Paper
Adhesive Type	Natural Rubber
Available Color	Light Beige

The data in this data table are the measured values of the product under certain conditions and are not guaranteed values.

Application:

- Automotive spray painting.
- Baking finish processes for plastic parts, hardware components and other workpieces.